


OMAGE®

Wi-Fi In-Ceiling Speakers

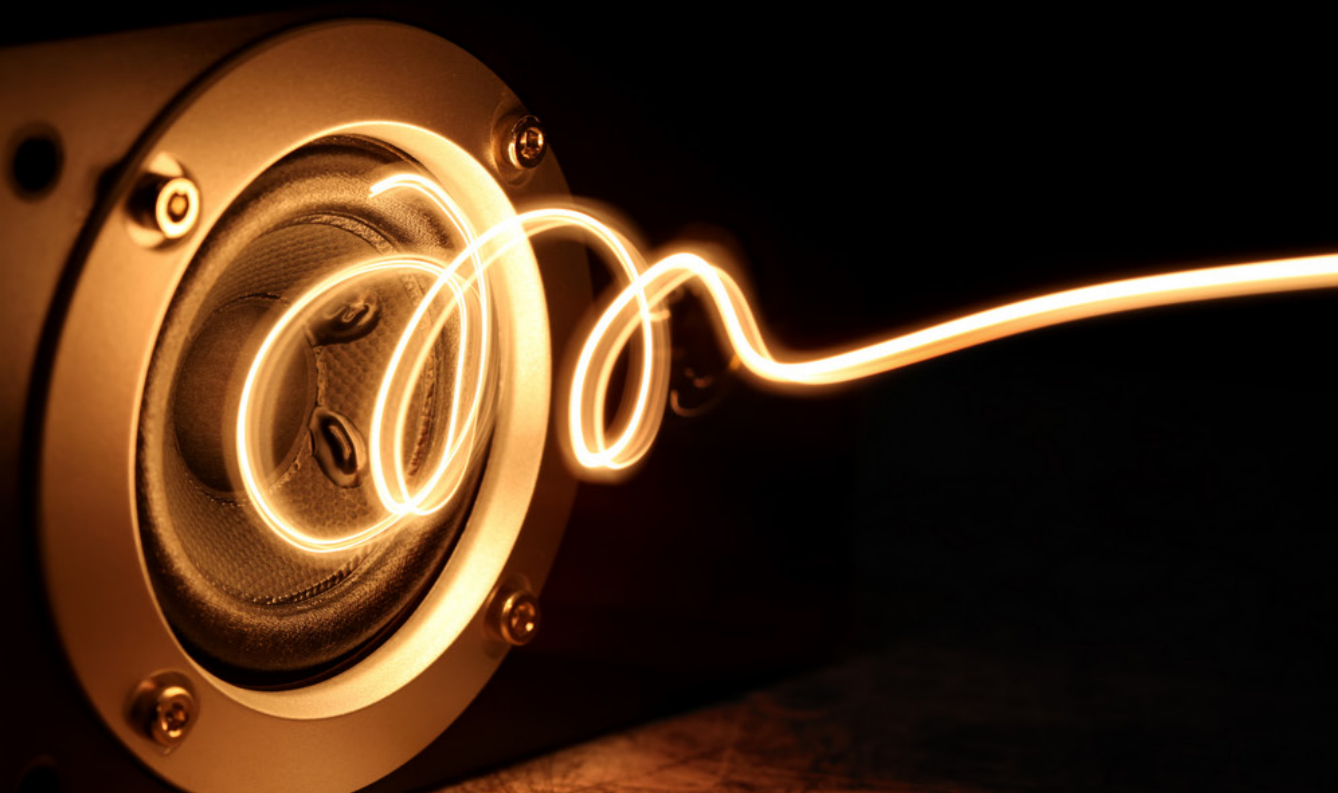


DNPR362

Low Profile In-Ceiling Wi-Fi Speaker

Q6WF

The **Q6WF** low profile, in-ceiling, Wi-Fi loudspeakers are ideal for multi-room music set-ups. A titanium dome, center mounted tweeter and a Kevlar cone woofer work in harmony to add a full-bodied sound that's crystal clear at any volume. Built-in Wi-Fi module or RJ45 hardware eliminate stutters, skips and drop-outs and delivers a perfect sync in every room.

PASSIVE SPEAKER



ACTIVE SPEAKER

Q6WF
6½" Wi-Fi Speaker Kit

POWER SUPPLY



- Q6WF wireless speaker system includes 1 Active + 1 Passive Speaker and with included power supply
- 6.5" Kevlar cone Woofer, 0.75" Titanium dome Tweeter
- 2 x 30 watts RMS Class D amplifier
- 1 x analog audio input for additional source connection
- Built-in Wi-Fi for wireless streaming
- Multi-room function: play many speakers at the same time
- Supports Airplay, DLNA and Wi-Fi Direct
- Smartphone, tablet and PC Supports on-line audio streaming media such as Spotify, Qplay, Deezer, TuneIn, iHeartRadio, etc...
- Audio format: AAC, LC/LTP, HE-ACCv1, HE-ACCv2, AMR-NB, AMR-WB, FLAC, MP3, Vorbis, PCM/WAVE, ALAC
- Wireless network compatibility 802.11b/g/n
- DC24v/2.5A power supply included

Model	Type	System	Woofer (inches)	Tweeter (inches)	Watt (RMS)	Frequency Response	Impedance (Ohms)	Sensitivity (dB)	Weight pr (kg / lb)	Unit Dimensions (H x W x D) (cm / inches)	Cutout hole dimension (cm / inches)
Q6WF	Round	2-way	6½	¾	2x30	60 Hz ~ 20 kHz	8	90	3.6/8	22.7 x 22.7 x 10/ 8.9 x 8.9 x 3.9	21 / 8¼

Q6WF

OMAGE®




Low Profile In-Ceiling Wi-Fi Speaker ^{DNPR362}

The **Q6WF** low profile, in-ceiling, Wi-Fi loudspeakers are ideal for multi-room music set-ups. A titanium dome, center mounted tweeter and a Kevlar cone woofer work in harmony to add a full-bodied sound that's crystal clear at any volume. Built-in Wi-Fi module or RJ45 hardware eliminate stutters, skips and drop-outs and delivers a perfect sync in every room.



Low profile speaker blends into ceiling

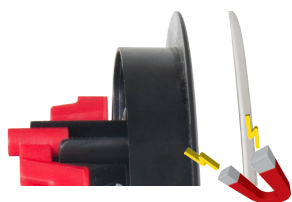

Magnetic grill for fast installation



Paintable grills to compliment any decor



Centered mounted swivel tweeter



Multi-Room

Enjoy your music everywhere! A multiple Q6WF setup makes it possible to play music in sync or different songs in each room



Music Playback

Preset music playlists can be played and controlled with your phone/tab/pc.



Multi-Channel

Listen to the radio in one room and your music playlist in another. The possibilities are endless.







Multi-Source

Supports audio streaming from your smart phone or tablet and supports Airplay, DLNA and Qplay

On-Line music

Easy to use Muzo Player app


Supported Music Services



The Q6-EXT extension kit comes with all you need to install the speaker in the wall/ceiling safely. The kit includes a CSA/FT4 50FT power extension, a three port wall plate, one power connector and two blank cover connectors.



Extension Kit

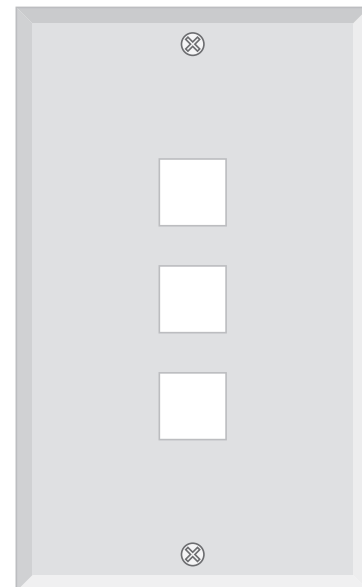

Q6-EXT Extension Kit

- 1 x 50ft CSA FT4 extension power wire
- 1 x 3 port wall plate
- 2 x Blank insert covers
- 1 x Power adapter (Female to Male)

Q6-REP Repeater

Q6-REP offers a dual band wireless broadcast that sends signals through walls and ceilings for flawless coverage even to the most remote room in your home. Helps deliver a strong signals to your wireless Q6WF speaker to eliminate stutters, skips and drop outs and delivers a perfect sync in every room.



Q6-REP